



扣压式软管接头



KF26741

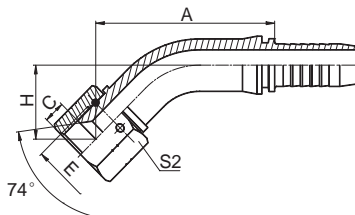

KF26741W

45° 美制 JIC 内螺纹 74° 内锥面
45° JIC FEMALE 74° CONE SEAT
SAE J514

代号 PART NO.	螺纹 E THREAD E	胶管 HOSE BORE		尺寸 DIMENSIONS			
		公称内径 DN	标号 DASH	A	C	H	S2
KF26741-04-03	7/16"X20	5	03	37.6	9	17.2	15
KF26741-04-04	7/16"X20	6	04	40.2	9	18.1	15
KF26741-05-04	1/2"X20	6	04	40.5	9.5	18.5	17
KF26741-05-05	1/2"X20	8	05	42.7	9.5	19.3	17
KF26741-05-06	1/2"X20	10	06	44.6	9.5	20.3	17
KF26741-06-04	9/16"X18	6	04	40.5	10.5	18.5	19
KF26741-06-05	9/16"X18	8	05	42.6	10.5	19.3	19
KF26741-06-06	9/16"X18	10	06	44.3	10.5	20	19
KF26741-08-06	3/4"X16	10	06	45.7	11	21.4	24
KF26741-08-08	3/4"X16	12	08	57.9	11	22.9	24
KF26741-10-08	7/8"X14	12	08	58.9	13	24	27
KF26741-10-10	7/8"X14	16	10	69.6	13	25.3	27
KF26741-10-12	7/8"X14	20	12	75.7	13	28.9	27
KF26741-12-08	1.1/16"X12	12	08	60	15	25.1	32
KF26741-12-10	1.1/16"X12	16	10	70.7	15	26.4	32
KF26741-12-12	1.1/16"X12	20	12	76.8	15	30	32
KF26741-14-12	1.3/16"X12	20	12	77.4	15	30	36
KF26741-16-12	1.5/16"X12	20	12	77.4	16	30	41
KF26741-16-16	1.5/16"X12	25	16	85.7	16	31.5	41
KF26741-20-20W	1.5/8"X12	32	20	95.9	17	35.2	50
KF26741-24-20W	1.7/8"X12	32	20	100.9	20	40.1	55
KF26741-24-24W	1.7/8"X12	40	24	114.8	20	44.1	55
KF26741-32-32W	2.1/2"X12	50	32	135.9	23.5	51.6	75

注：1. 表中代号用于编织软管。 2. 如需用于缠绕软管代号改为 26742-xx-xx。
Note: 1. For use with braided hoses. 2. If use with spiral hoses, hose fitting series number is 26742-xx-xx.